



## PS-0233

### Product Description:


PS-0233 is a polyester which has been coated with a high performance acrylic adhesive. The material is supplied coated on one side with a removable siliconized polyester release liner.

### Construction / Properties:

Property	Value	Test Method
Total Thickness	0.08 mm	QSP-726
Acrylic Thickness	0.03 mm	QSP-726
Polyester Carrier Thickness	0.05 mm	QSP-726
Siliconized Liner Thickness	0.05 mm	QSP-726
Adhesive Peel Strength to SUS	1000 g/25mm	QSP-722
Continuous Use Conditions	0 to 90 C	WI-8.2-13
Intermittent Use Conditions	120 C	WI-8.2-13

### Features

- Excellent Tack
- Good Shear Strength
- Solvent Free
- Excellent Adhesion to a Variety of Substrates

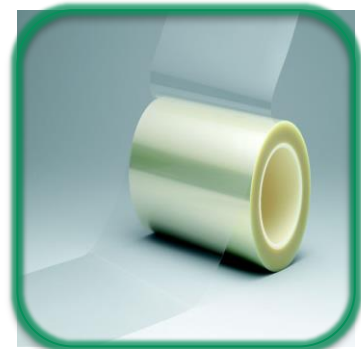

Specific tests should be performed by the end user to determine the product suitability for the particular application.

For Additional Information:

E-Mail: [sales@polymerscience.com](mailto:sales@polymerscience.com)

Toll Free: +1 888.533.7004

Web: [www.polymerscience.com](http://www.polymerscience.com)

Revision: 050115