



PS-0285

Product Description:


PS-0285 is a siliconized aluminum foil which has been coated with a high performance acrylic adhesive.

Construction / Properties:

Property	Value	Test Method
Total Thickness	0.12 mm	QSP-726
Acrylic Thickness	0.45 mm	QSP-726
Siliconized Aluminum Thickness	0.75 mm	QSP-726
Adhesive Peel Strength to SUS	12 N/25mm	QSP-722
Tack Rolling Ball	15 cm	ASTM D3121
Tensile Strength	100 N/25mm	ASTM D3759
Elongation	5.0%	ASTM D3759
Continuous Use Conditions	-40 to 149 C	WI-8.2-13
Recommended Application Temperature	10 to 40 C	--

Features

- Excellent Adhesion
- Heat and Light Reflective
- Flame Resistance
- Weather Resistant
- Excellent Adhesion to a Variety of Substrates

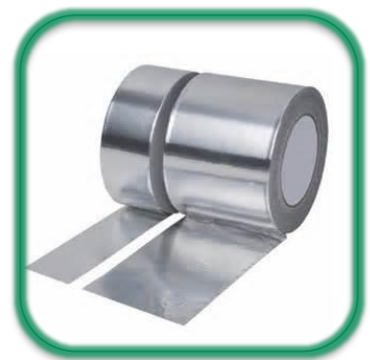

Specific tests should be performed by the end user to determine the product suitability for the particular application.

For Additional Information:

E-Mail: sales@polymerscience.com

Toll Free: +1 888.533.7004

Web: www.polymerscience.com

Revision: 050115