



## PS-1182

### Product Description:


PS-1182 is an aliphatic polycaprolactone polyurethane film which is supplied on a brushed polyester casting layer.

### Construction / Properties:

Property	Value	Test Method
Thickness	0.05 mm	QSP-726
Color	Natural	Visual
Hardness (Shore D)	60	QSP-731
Tensile Strength, Yield	7000 psi	ASTM D882
Elongation at Break	450%	ASTM D882
Continuous Use Conditions	-40 – 95C	WI-8.2-13

### Features

- Converter Friendly
- Good Dimensional Stability
- Resists Extended UV Exposure
- Economical

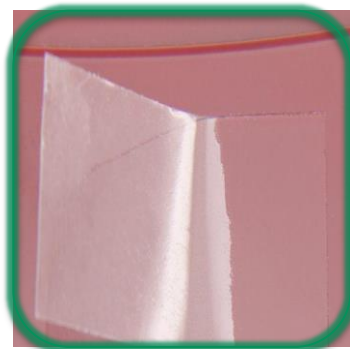

Specific tests should be performed by the end user to determine the product suitability for the particular application.

For Additional Information:

E-Mail: [sales@polymerscience.com](mailto:sales@polymerscience.com)

Toll Free: +1 888.533.7004

Web: [www.polymerscience.com](http://www.polymerscience.com)

Revision: 050115