



PS-1332


Product Description:

P-SHIELD® PS-1332 is a nickel copper plated electrically conductive fabric coated on each side with an electrically conductive acrylic pressure sensitive adhesive to allow conductivity in the x, y and z-plane.

Construction / Properties:

Property	Value		Test Method
Total Thickness	0.05 mm	0.11 mm	QSP-726
Fabric Type	Nonwoven	Woven	--
Surface Resistivity	<0.1 Ω/sq	<0.3 Ω/sq	QSP-741
Z-Axis Resistance	<0.1 Ω/in ²	<0.2 Ω/in ²	QSP-741
Color	Gray		Visual
Adhesive Peel Strength (to SUS)	>800 g/25mm		QSP-722
Shielding Effectiveness (30 MHz- 1.5 GHz)	70 – 100 dB		--
Recommended Application Specification	2 kg/square inch for 2 seconds		--
Continuous Use Conditions	-10 – 80 C		WI-8.2-13

Shielding Effectiveness:

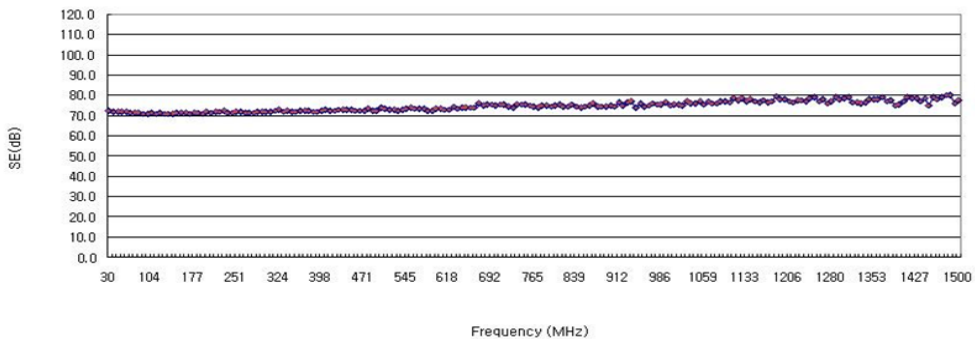

Specific tests should be performed by the end user to determine the product suitability for the particular application.

For Additional Information:

E-Mail: sales@polymerscience.com

Toll Free: +1 888.533.7004

Web: www.polymerscience.com

Revision: 050115




PS-1332

Product Description: P-SHIELD® PS-1332 is a nickel copper plated electrically conductive fabric coated on each side with an electrically conductive acrylic pressure sensitive adhesive to allow conductivity in the x, y and z-plane.

Features

- Superior Converting Properties
- Excellent Conformability
- Excellent Tack
- Excellent Adhesion to Low Surface Energy Substrates
- Excellent Shielding Effectiveness
- RoHS and HF Compliant

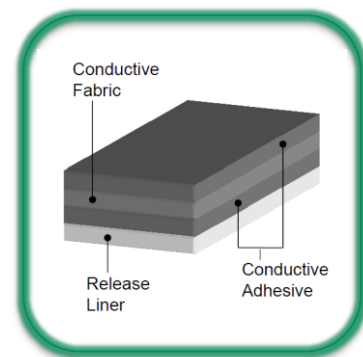

Specific tests should be performed by the end user to determine the product suitability for the particular application.

For Additional Information:

E-Mail: sales@polymerscience.com

Toll Free: +1 888.533.7004

Web: www.polymerscience.com

Revision: 050115