



# PS-1798

## Product Description:


P-SHIELD® PS-1798 is a multi-layer ITO coated film that offers a range of resistance from 100Ω to 240Ω in a variety of thickness options. The ITO layer is coated onto a polyester film coated on each side with a hard coating to resist scratching and improving processability.

## Construction / Properties:

Property	Value	Test Method
Thickness (ITO Layer)	50 – 188 μm	QSP-726
Surface Resistivity 150 C/1 hr)	100-240 Ω/sq	QSP-741
Uniformity (Surface Resistance)	≤10%	QSP-741
Transmittance (150 C/1 hr)	≥85%	ASTM D1003
Haze (150 C/1 hr)	≤1.5%	ASTM D1003
Hub b* Value	1.0%	ASTM D1003
Curl (150 C/1 hr)	≥-5/≤10mm	--
ITO Adhesion	100%	--
Peeling Strength	25 g/50mm	--

## Features

- Excellent Flexibility
- Excellent for Automated Dispensing Applications
- RoHS and HF Compliant

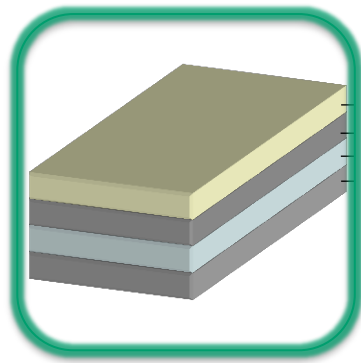

Specific tests should be performed by the end user to determine the product suitability for the particular application.

For Additional Information:

E-Mail: [sales@polymerscience.com](mailto:sales@polymerscience.com)

Toll Free: +1 888.533.7004

Web: [www.polymerscience.com](http://www.polymerscience.com)

Revision: 050715