



## PS-0210

### Product Description:


PS-0210 is a polyester film that has been coated on each side with an acrylic adhesive. PS-0210 is supplied with a PET siliconized liner on each side.

### Construction / Properties:

Property	Value	Test Method
Total Thickness	0.01 mm ± 0.003 mm	QSP-726
Polyester Thickness	0.002 mm	QSP-726
Adhesive Thickness (each side)	0.004 mm	QSP-726
Adhesion to SUS	>1200 g <sub>f</sub> /25mm	QSP-722
Continuous Use Temperatures	-10 – 100 C	WI-8.2-13

### Features

- Excellent for Hand Application
- Superior for Automated Dispensing Applications
- Excellent Adhesion to a Variety of Substrates

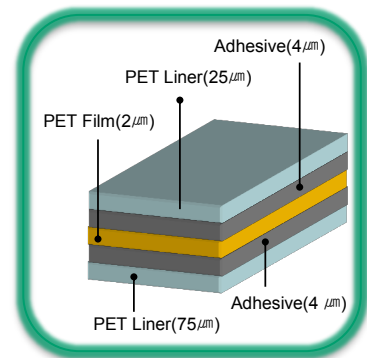

Specific tests should be performed by the end user to determine the product suitability for the particular application.

For Additional Information:

E-Mail: [sales@polymerscience.com](mailto:sales@polymerscience.com)

Toll Free: +1 888.533.7004

Web: [www.polymerscience.com](http://www.polymerscience.com)

Revision: 101616