



PS-2335

Product Description:


P-SHIELD® PS-2335 is a nickel and copper plated soft conductive polyurethane foam multi-laminate containing a copper nickel mesh core to provide excellent conductivity in all axes as well as structure and restitution.

Construction / Properties:

Property	Value	Test Method
Total Thickness	2.0mm	QSP-726
Total Thickness Tolerance	+/- 10%	--
Color	Gray	Visual
Surface Resistivity	<0.5 Ω /sq	QSP-741
Z-Axis Resistance	<0.5 Ω /in ²	QSP-741
Continuous Use Conditions	-10 – 80 C	WI-8.2-13

Features

- Excellent Conductive Properties
- Good Resistance to Heat and Humidity
- Excellent Shielding Effectiveness
- RoHS and HF Compliant

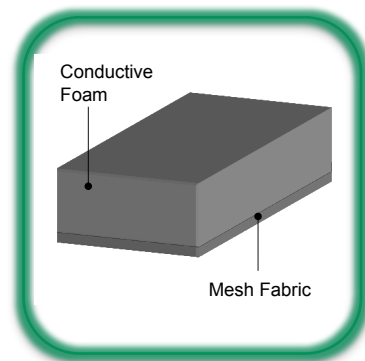

Specific tests should be performed by the end user to determine the product suitability for the particular application.

For Additional Information:

E-Mail: sales@polymerscience.com

Toll Free: +1 888.533.7004

Web: www.polymerscience.com

Revision: 121116