



PS-1342


Product Description:

P-SHIELD® PS-1342 is a nickel copper plated electrically conductive ripstop woven fabric coated with an electrically conductive acrylic adhesive providing conductivity in the x, y and z-plane.

Construction / Properties:

Property	Value	Test Method
Total Thickness	0.05 mm ± 0.01 mm	QSP-726
Fabric Type	Ripstop Woven	--
Color	Black	Visual
Adhesive Peel Strength (to SUS)	>1000 g/25mm	QSP-722
Recommended Application Specification	2 kg/square inch pressure for 2 seconds	--
Surface Resistivity (Adhesive)	<0.1 Ω/sq	QSP-741
Shielding Effectiveness (30 MHz- 1.5 GHz)	70 – 100 dB	ASTM D4935-99
Continuous Use Conditions	-10 – 80 C	WI-8.2-13

Shielding Effectiveness:

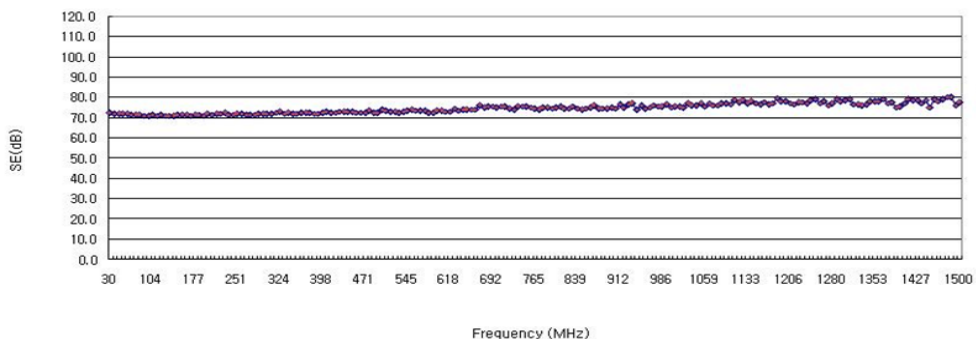

Specific tests should be performed by the end user to determine the product suitability for the particular application.

For Additional Information:

E-Mail: sales@polymerscience.com

Toll Free: +1 888.533.7004

Web: www.polymerscience.com

Revision: 021717




PS-1342

Product Description:

P-SHIELD® PS-1342 is a nickel copper plated electrically conductive ripstop woven fabric coated with an electrically conductive acrylic adhesive providing conductivity in the x, y and z-plane.

Features

- Excellent Conformability
- Excellent Adhesion to Low Energy Substrates
- Good Shielding Effectiveness Over a Wide Frequency Range
- RoHS and HF Compliant

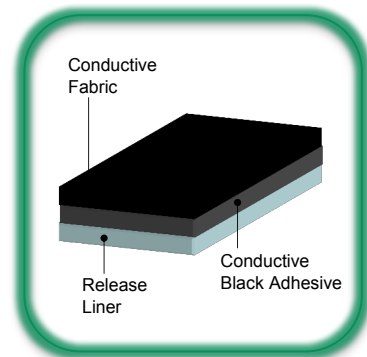

Specific tests should be performed by the end user to determine the product suitability for the particular application.

For Additional Information:

E-Mail: sales@polymerscience.com

Toll Free: +1 888.533.7004

Web: www.polymerscience.com

Revision: 021717