



PS-2342


Product Description:

P-SHIELD® PS-2342 is a conductive copper foil with a conductive acrylic for shielding/grounding applications.

Construction / Properties:

| Property | Value | Test Method |
|---|--------------------------------|-------------|
| Total Thickness | 0.065 mm ± 0.01mm | QSP-726 |
| Foil | Electroplated Copper | -- |
| Adhesive Peel Strength (to SUS) | >1200 g/25mm | QSP-722 |
| Surface Resistivity | <0.5 Ω/sq | QSP-741 |
| Z-Axis Resistance | <0.5 Ω/in ² | QSP-741 |
| Shielding Effectiveness (10 MHz- 100 GHz) | 70 – 100 dB | -- |
| Thermal Conductivity | >100 | ASTM D5470 |
| Recommended Application Specification | 2 kg/square inch for 2 seconds | -- |
| Continuous Use Conditions | -10 – 80 C | WI-8.2-13 |

Shielding Effectiveness:

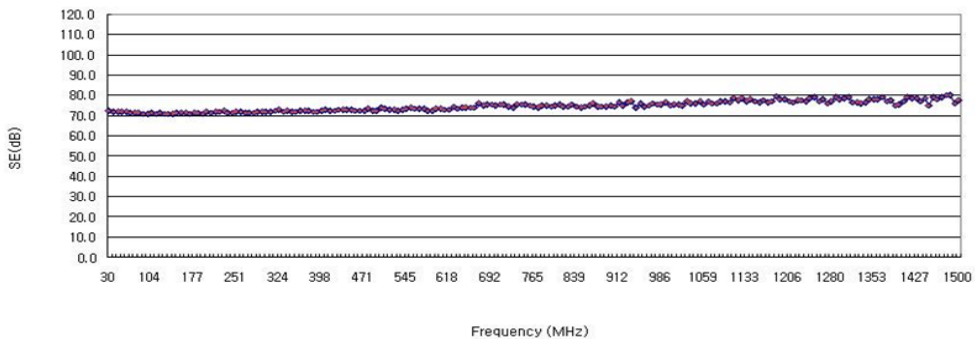

Specific tests should be performed by the end user to determine the product suitability for the particular application.

For Additional Information:

E-Mail: sales@polymerscience.com

Toll Free: +1 888.533.7004

Web: www.polymerscience.com

Revision: 030617




PS-2342

Product Description:

P-SHIELD® PS-2342 is a conductive copper foil with a conductive acrylic for shielding/grounding applications.

Features

- Superior Converting Properties
- Excellent Conformability
- Good Durability
- Excellent Shielding Effectiveness
- RoHS and HF Compliant

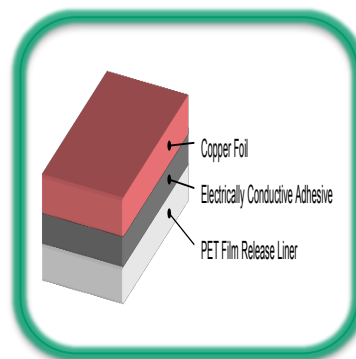

Specific tests should be performed by the end user to determine the product suitability for the particular application.

For Additional Information:

E-Mail: sales@polymerscience.com

Toll Free: +1 888.533.7004

Web: www.polymerscience.com

Revision: 030617