



## PS-1186

### Product Description:


PS-1186 is a differential coated polyester film. The coated two side tape utilizes an acrylic adhesive on one side of the polyester carrier and a silicone pressure sensitive adhesive on the reverse side of the film carrier.

### Construction / Properties:

Property	Value	Test Method
Total Thickness	0.1 mm ± 0.01 mm	QSP-726
Acrylic Adhesive Coat Weight	37 gsm	QSP-724
Polyester Carrier Thickness	0.025 mm	QSP-726
Silicone Adhesive Coat Weight	37 gsm	QSP-724
Acrylic PSA Liner	Siliconized paper	Visual
Silicone PSA Liner	Clear polyester	Visual
Adhesive Peel Strength	Acrylic PSA >1500 g/in Silicone PSA 600 g/in	QSP-722
Continuous Use Conditions	10 - 120 C	WI-8.2-13

### Features

- Excellent Tack
- Good Resistance to Heat and Humidity
- Excellent Adhesion to Low Surface Energy Substrates

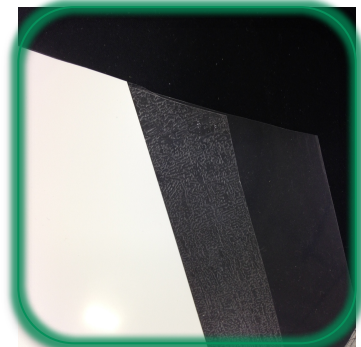

Specific tests should be performed by the end user to determine the product suitability for the particular application.

For Additional Information:  
 E-Mail: [sales@polymerscience.com](mailto:sales@polymerscience.com)  
 Toll Free: +1 888.533.7004  
 Web: [www.polymerscience.com](http://www.polymerscience.com)

Revision: 032017