



## PS-2339

### Product Description:


P-SHIELD® PS-2339 is a nickel and copper plated conductive woven fabric coated with a heat activated adhesive onto one side of the fabric.

### Construction / Properties:

Property	Value	Test Method
Conductive Fabric Thickness	0.016mm	QSP-726
Conductive Hot Melt Adhesive Thickness	0.014mm	QSP-726
Total Thickness	0.028mm ± 20%	QSP-726
Product Width	520 mm	QSP-726
Color	Gray	Visual
Fabric	Copper Nickel Plated Polyester	--
Surface Resistivity	<0.07 Ω/sq (Fabric Side)	QSP-741
Activation Temperature of Adhesive	60 - 90 C	--
Shielding Effectiveness (10 MHz- 1 GHz)	50 – 70 dB	--

### Features

- Superior Converting Properties
- Excellent Conformability
- Superior Durability
- Good Shielding Effectiveness
- RoHS and HF Compliant

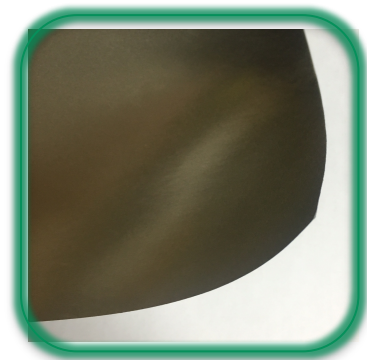

Specific tests should be performed by the end user to determine the product suitability for the particular application.

For Additional Information:

E-Mail: [sales@polymerscience.com](mailto:sales@polymerscience.com)

Toll Free: +1 888.533.7004

Web: [www.polymerscience.com](http://www.polymerscience.com)

Revision: 032917