



## PS-0258

### Product Description:


PS-0258 is a polyester film that has been coated on each side with an acrylic adhesive. PS-0258 is supplied with a polyester release liner on each side of the construction.

### Construction / Properties:

Property	Value	Test Method
Total Thickness	0.005 mm ± 0.001 mm	QSP-726
Polyester Thickness	0.0014 mm	QSP-726
Adhesion to SUS	800 gf/25mm	QSP-722
Elongation	20%	--
Tensile Strength	0.2 kgf/cm	--

### Features

- Good Shear Strength
- Excellent for Hand Application
- Superior for Automated Dispensing Applications
- Excellent Adhesion to a Variety of Substrates

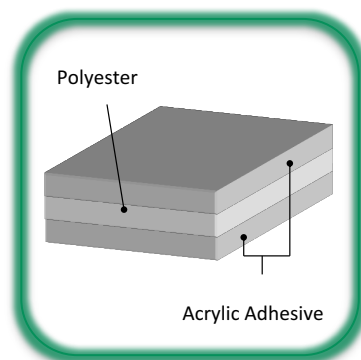

Specific tests should be performed by the end user to determine the product suitability for the particular application.

For Additional Information:

E-Mail: [sales@polymerscience.com](mailto:sales@polymerscience.com)

Toll Free: +1 888.533.7004

Web: [www.polymerscience.com](http://www.polymerscience.com)

Revision: 061317