

PS-1684

Product Description:


P-THERM® PS-1684 is a heat spreader using the construction of a rolled copper foil which has been coated with a reflective white coating on the face and having an acrylic adhesive for application to the heat source. The heat spreader allows for quick dissipation of heat in the x-y direction. The soft adhesive formulation allowing fast whet out and reflective white coating makes PS-1684 an excellent option for LED applications.

Construction / Properties:

Property	Value	Test Method
Total Thickness	0.1 mm ± 0.01 mm	QSP-726
Support Substrate	Rolled Copper Foil	--
Color	White	Visual
Adhesive Peel Strength (to SUS)	>1800 g/25mm	QSP-722
Composite X-Y Thermal Conductivity	>200 W/m K	QSP-749
Recommended Application Specification	2 kg/square inch for 2 seconds	--
Continuous Use Conditions	-10 – 80 C	WI-8.2-13

Features

- Superior Converting Properties
- Good Adhesive and Cohesive Strength
- Good Conformity to Non-Flat Substrates
- Good Thermal Conductivity
- RoHS and HF Compliant

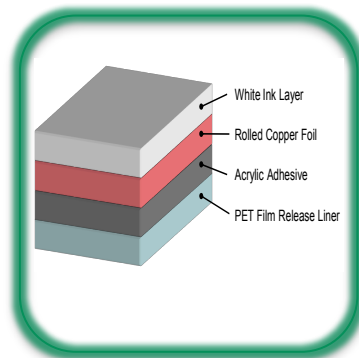

Specific tests should be performed by the end user to determine the product suitability for the particular application.

For Additional Information:

E-Mail: sales@polymerscience.com

Toll Free: +1 888.533.7004

Web: www.polymerscience.com

Revision: 063017