



PS-2330

Product Description:


P-SHIELD® PS-2330 is an aluminum foil support that has been coated on each side with an electrically conductive acrylic which provides electrical conductivity in the x, y and z-plane.

Construction / Properties:

Property	Value	Test Method
Total Thickness	0.14 mm ± 0.014 mm	QSP-726
Support Material	Aluminum Foil	--
Support Thickness	0.070 mm	QSP-726
Color	Dark Gray	Visual
Adhesive Peel Strength (to SUS)	>1800 gf/25mm	QSP-722
Surface Resistivity	<0.5 Ω/sq	QSP-741
Z-Axis Resistance	<0.5 Ω/in ²	QSP-741
Recommended Application Specification	2 kg/square inch for 2 seconds	--
Continuous Use Conditions	-10 – 80 C	WI-8.2-13

Features

- Excellent Adhesion to a wide variety of substrates
- Good Shielding Effectiveness Over a Wide Frequency Range
- RoHS and HF Compliant

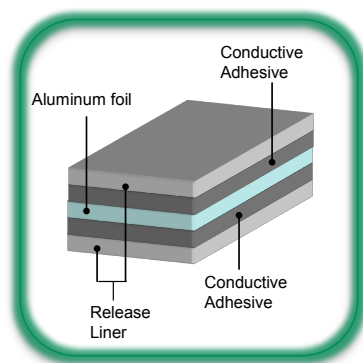

Specific tests should be performed by the end user to determine the product suitability for the particular application.

For Additional Information:

E-Mail: sales@polymerscience.com

Toll Free: +1 888.533.7004

Web: www.polymerscience.com

Revision: 070217