



## PS-2350

### Product Description:


P-SHIELD® PS-2350 is a rolled copper foil demonstrating good thermal stability and electrical conductivity.

### Construction / Properties:

Property	Value	Test Method
Total Thickness	0.025 and 0.035 mm	QSP-726
Color	Copper	Visual
Surface Resistivity	<0.03 $\Omega/\text{in}^2$	QSP-741
Z-Axis Resistance	<0.03 $\Omega/\text{in}^2$	QSP-741
Elongation at Break	>10%	--
Continuous Use Conditions	0 – 80 C	WI-8.2-13

### Features

- Highly Flexible
- Excellent for Heat Dissipation
- Excellent Shielding Effectiveness
- RoHS and HF Compliant

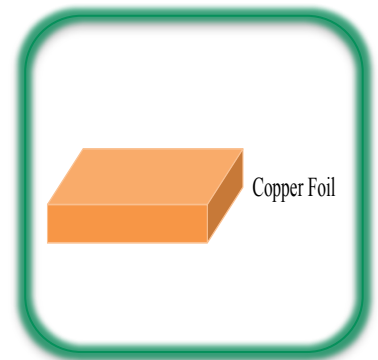

Specific tests should be performed by the end user to determine the product suitability for the particular application.

For Additional Information:

E-Mail: [sales@polymerscience.com](mailto:sales@polymerscience.com)

Toll Free: +1 888.533.7004

Web: [www.polymerscience.com](http://www.polymerscience.com)

Revision: 082317