

PS-0235

Product Description:

PS-0235 is a black modified acrylic adhesive which is initially applied with pressure and further activated with application of heat.

Construction / Properties:


Property	Value	Test Method
Available Thickness	0.05 mm	QSP-726
Color	Black	--
Shear Strength	>8 Kgf	--
Bonding Conditions	80 - 100 C	--
Recommended Storage Temperature	10 - 40 C	--

Test Method Summary

Substrates: 1mm thickness
 Bonding Area: 5mm x 5mm
 Bonding Conditions: 100 C/0.2 Mpa/3 sec
 Mechanical Bonding Method: Up and Down Plate Heating System
 Pre-fixing → Pressing/Bonding → 1 hr Aging at Room Temperature
 Bond Strength Determined using UTM Tester at 50mm/min
 Pre-Bonding is not Necessary

Features

- Converter Friendly
- Excellent Shear Strength
- Resistant to Moisture
- Prebonding is not necessary

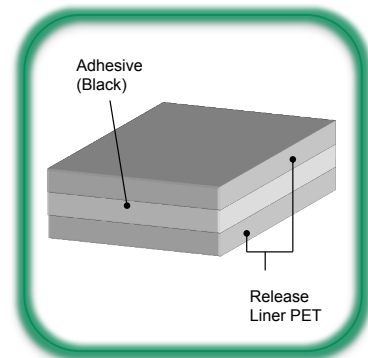

Specific tests should be performed by the end user to determine the product suitability for the particular application.

For Additional Information:
 E-Mail: sales@polymerscience.com
 Toll Free: +1 888.533.7004
 Web: www.polymerscience.com

Revision: 091217