



PS-2354

Product Description:


P-SHIELD® PS-2354 is a nickel and copper plated conductive woven fabric coated with a heat activated adhesive onto one side of the fabric.

Construction / Properties:

Property	Value	Test Method
Total Thickness	0.028mm ± 0.006mm	QSP-726
Product Width	520 mm	QSP-726
Color	Gray	Visual
Fabric	Copper Nickel Plated Polyester	--
Surface Resistivity	<0.05 Ω/sq (Fabric Side)	QSP-741
Activation Temperature of Adhesive	55 - 65 C	--
Shielding Effectiveness (10 MHz- 1 GHz)	70 - 100 dB	--

Features

- Superior Converting Properties
- Excellent Conformability
- Superior Durability
- Good Shielding Effectiveness
- RoHS and HF Compliant

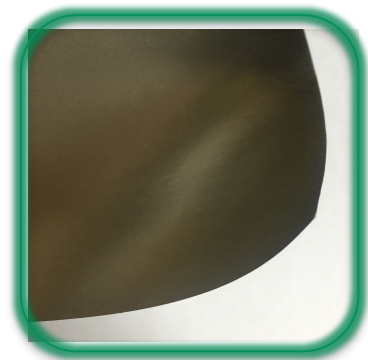

Specific tests should be performed by the end user to determine the product suitability for the particular application.

For Additional Information:

E-Mail: sales@polymerscience.com

Toll Free: +1 888.533.7004

Web: www.polymerscience.com

Revision: 071117