



# PS-1394


## Product Description:

P-SHIELD® PS-1394 is a nickel and copper plated conductive woven fabric coated with a heat activated adhesive onto one side of the fabric.

## Construction / Properties:

Property	Value	Test Method
Total Thickness	0.06mm	QSP-726
Product Width	1060 mm	QSP-726
Color	Black	Visual
Fabric	Copper Nickel Plated Polyester	--
Surface Resistivity	<0.07 Ω/sq	QSP-741
Activation Temperature of Adhesive	82 – 100 C	--
Shielding Effectiveness (30 MHz- 1.5 GHz)	70 – 80 dB	--
Continuous Use Conditions	-10 – 80 C	WI-8.2-13

## Shielding Effectiveness:

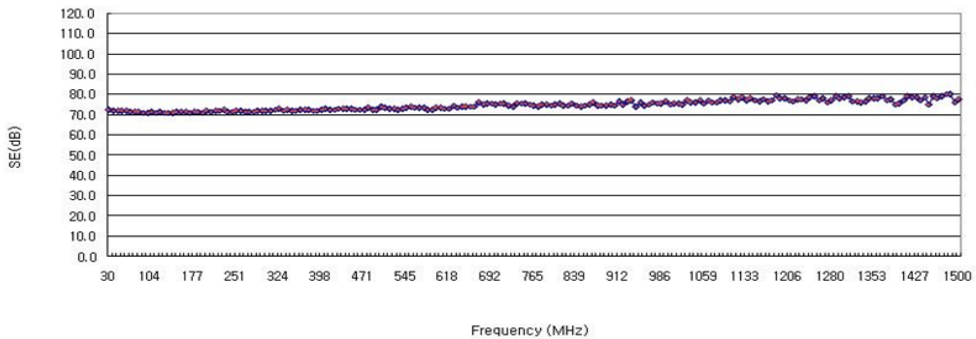

Specific tests should be performed by the end user to determine the product suitability for the particular application.

For Additional Information:

E-Mail: [sales@polymerscience.com](mailto:sales@polymerscience.com)

Toll Free: +1 888.533.7004

Web: [www.polymerscience.com](http://www.polymerscience.com)

Revision: 121417

P-SHIELD®




## PS-1394

### Product Description:

P-SHIELD® PS-1394 is a nickel and copper plated conductive woven fabric coated with a heat activated adhesive onto one side of the fabric.

### Features

- Superior Converting Properties
- Excellent Conformability
- Superior Durability
- Excellent Shielding Effectiveness
- RoHS and HF Compliant

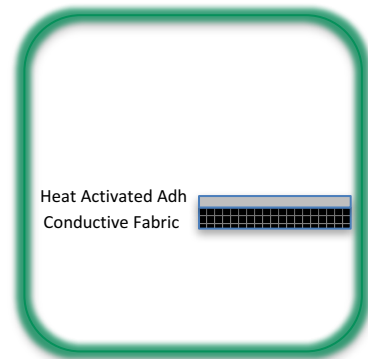

Specific tests should be performed by the end user to determine the product suitability for the particular application.

For Additional Information:

E-Mail: [sales@polymerscience.com](mailto:sales@polymerscience.com)

Toll Free: +1 888.533.7004

Web: [www.polymerscience.com](http://www.polymerscience.com)

Revision: 121417