



PS-1395


Product Description:

P-SHIELD® PS-1395 is a nickel and copper plated conductive woven fabric coated with a heat activated adhesive onto one side of the fabric.

Construction / Properties:

Property	Value	Test Method
Total Thickness	0.08mm	QSP-726
Product Width	1060 mm	QSP-726
Color	Black	Visual
Fabric	Copper Nickel Plated Polyester	--
Surface Resistivity	<0.05 Ω /sq	QSP-741
Activation Temperature of Adhesive	82 – 110 C	--
Shielding Effectiveness (30 MHz- 1.5 GHz)	70 – 80 dB	--
Continuous Use Conditions	-10 – 80 C	WI-8.2-13

Shielding Effectiveness:

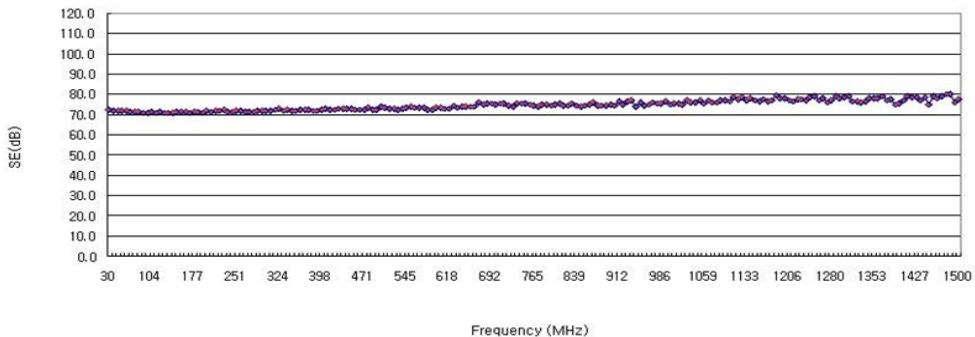

Specific tests should be performed by the end user to determine the product suitability for the particular application.

For Additional Information:

E-Mail: sales@polymerscience.com

Toll Free: +1 888.533.7004

Web: www.polymerscience.com

Revision: 121417



PS-1395

Product Description:

P-SHIELD® PS-1395 is a nickel and copper plated conductive woven fabric coated with a heat activated adhesive onto one side of the fabric.

Features

- Superior Converting Properties
- Excellent Conformability
- Superior Durability
- Excellent Shielding Effectiveness
- RoHS and HF Compliant



Specific tests should be performed by the end user to determine the product suitability for the particular application.

For Additional Information:

E-Mail: sales@polymerscience.com

Toll Free: +1 888.533.7004

Web: www.polymerscience.com

Revision: 121417