



PS-0283

Product Description:


PS-0283 is a multilaminate consisting of a black acrylic PSA foam on each side of a foam core. PS-0283 was developed to provide good anchorage to a variety of substrates used for indoor general purpose mounting and joining.

Construction / Properties:

Property	Value	Test Method
Color	Black	--
Total Thickness	0.86 mm	QSP-726
Thickness Tolerance	± 10%	--
Density	0.30 g/cm ³	ASTM D3330
Adhesive Peel Strength (SUS304)	>1000 g/25mm (Foam Side) >1500 g/25mm (PET Side)	QSP-722
Dynamic Shear	>33.79 kgf/6.45 cm ²	ASTM D1002
Static Shear	>10000 min	ASTM D3654
Continuous Use Conditions	-10 to 80 C	WI-8.2-13

Features

- Excellent Sealing of Internal Joints
- Ability to Effectively Block Light
- Excellent Adhesion to a Variety of Substrates

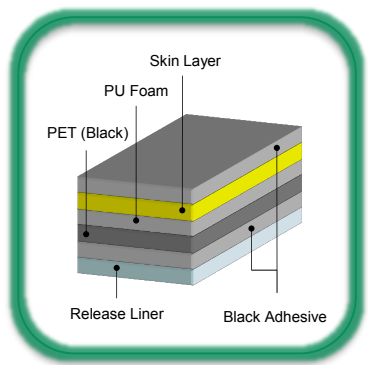

Specific tests should be performed by the end user to determine the product suitability for the particular application.

For Additional Information:
 E-Mail: sales@polymerscience.com
 Toll Free: +1 888.533.7004
 Web: www.polymerscience.com