

PS-0266

Product Description:

P-THERM® PS-0266 is a single coated, thermally conductive acrylic transfer adhesive with a siliconized paper release liner.

Construction / Properties:


Property	Value	Test Method
Color	White	Visual
Total Thickness	0.05mm	QSP-726
Adhesive Peel Strength (to SUS)	2270 g/25mm	QSP-722
Thermal Conductivity	0.55 W/m K	QSP-749
Continuous Use Conditions	-40 - 85 C	QSP-754
Flammability Rating	V-0	UL 94

Features:

- Non-Silicone
- High Temperature Resistance
- Low Stress on Components
- Shock Absorbing
- Low VOC
- RoHS and HF Compliant

Conductive Acrylic
Transfer Adhesive

Siliconized Paper
Release Liner

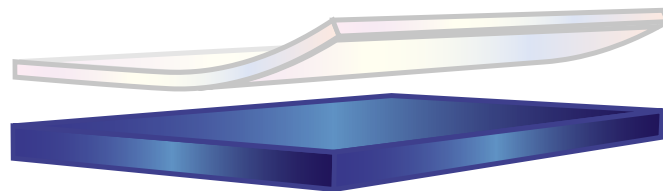

Specific tests should be performed by the end user to determine the product stability for the particular application.

For Additional Information:

E-mail: sales@polymerscience.com
Toll Free: +1 888.533.7004
Web: www.polymerscience.com
Revision: 012219