

PS-1651

Product Description:


P-THERM® PS-1651 is a double coated, thermally conductive acrylic adhesive with an aluminum foil carrier and siliconized paper release liners.

Construction / Properties:

Property	Value	Test Method
Color	White	Visual
Total Thickness	0.15mm	QSP-726
Support	0.05mm Aluminum Foil	--
Adhesive Peel Strength (to SUS)	2270 g/25mm	QSP-722
Thermal Conductivity	0.55 W/m K	QSP-749
Continuous Use Conditions	-40 - 85 C	QSP-754
Flammability Rating	V-0	UL 94

Features:

- Non-Silicone
- High Temperature Resistance
- Low Stress on Components
- Shock Absorbing
- Low VOC
- RoHS and HF Compliant

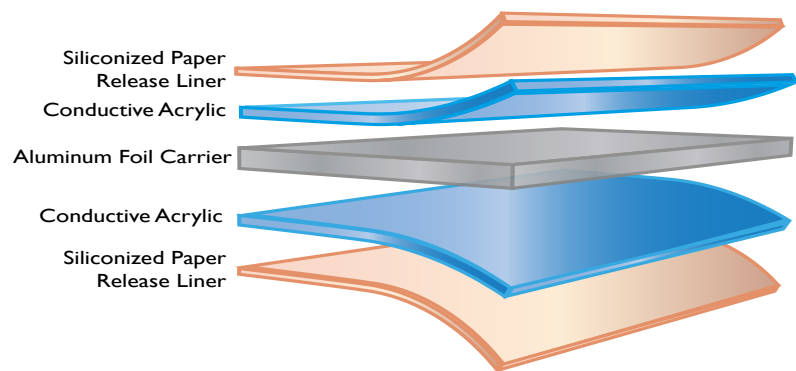

Specific tests should be performed by the end user to determine the product stability for the particular application.

For Additional Information:

E-mail: sales@polymerscience.com
Toll Free: +1 888.533.7004
Web: www.polymerscience.com
Revision: 012119