

# PS-I679

### Product Description:


P-THERM® PS-I679 is a double coated copper foil and graphite hybrid heat spreader that has been coated with a clear acrylic adhesive on the copper side of the construction and a black acrylic on the graphite side of the construction.

### Construction / Properties:

Property	Value	Test Method
Total Thickness	0.15mm +/- 0.03mm	QSP-726
Carrier Type	Copper Foil/Synthetic Graphite	--
Carrier Thickness	0.125mm	--
Color	Copper/Black	Visual
Adhesive Peel Strength (to SUS)	1800 g/25mm	QSP-722
Shielding Effectiveness	>60 dB	--
Composite X-Y Thermal Conductivity	>550 W/m K	QSP-749
Recommended Application Specification	2 kg/square inch for 2 seconds	--
Continuous Use Conditions	-40 - 400 C	QSP-754

### Features:

- Superior Converting Properties
- Good Adhesive and Cohesive Strength
- Good Conformity to Non-Flat Substrates
- Good Thermal Conductivity
- RoHS and HF Compliant

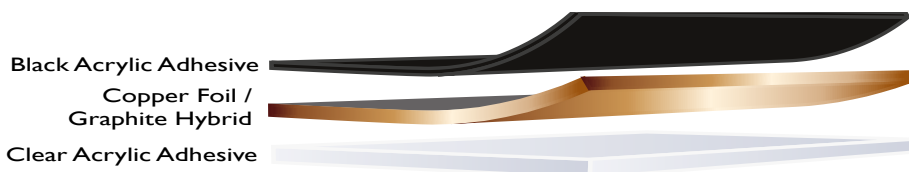

Specific tests should be performed by the end user to determine the product stability for the particular application.

### For Additional Information:

E-mail: [sales@polymerscience.com](mailto:sales@polymerscience.com)  
Toll Free: +1 888.533.7004  
Web: [www.polymerscience.com](http://www.polymerscience.com)  
Revision: 012219